

The GLO-JO® P.A.L.™ – Helmet Band (KEVLAR)


General Info & Install Instructions

1. The activation of the GLO-JO P.A.L.™ - Helmet Band (KEVLAR) **should occur prior to ones arrival**. This pre-arrival activation typically occurs during the donning of one's personal protective equipment (PPE).
2. In colder temperatures the rubber protective boot / push button "on and off switch" may stiffen and may require more effort to activate; it is recommended to turn on the unit in room temperature (>60F)
3. Check Batteries regularly and replace once every 90 Days to ensure Flawless Operation.
4. Please refer to GLO-JO's web-site for any questions you may have (www.glojohelmetband.com).




TOP DOWN VIEW

Front of Helmet



Back of Helmet

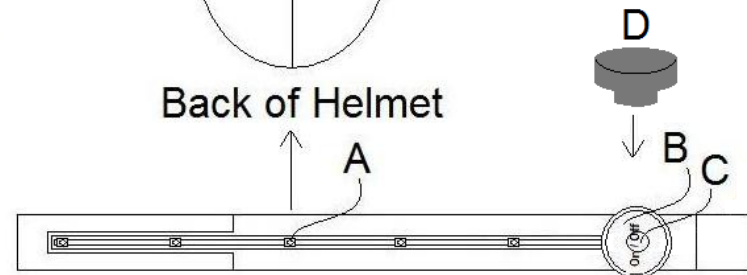


1. Adjust your helmet band to the proper diameter using the helmet bands adjustability features (Left & Right Adjustability Buckles, and adjust length of our Rubber Strapping accordingly).
2. Be sure when adjusting your helmet band, that the **CENTER LED (A)** is positioned at the **CENTERLINE** of your helmet
3. Once band is properly adjusted and positioned according to your helmets centerline, you can now set-up the self-adhesive Velcro Tabs. This should done by removing the adhesive tabs and applying them to an unobstructed area at the rear of your Helmet

- A) Center LED (Installation Alignment)
- B) Battery Housing
- C) Screw-top Battery Cover / Activation Switch
- D) Black Rubber Protective Boot

Battery Installation: Remove Black Rubber Protective Boot by **Peeling It Off (D)**. Find Screw-top Battery Cover (C) & **Unscrew It Counter Clockwise to Open**. After the Screw-top is removed, the batteries will be accessible. Two batteries will be found stacked on top of each other. Replace the batteries in the same (+) (-) sequence found. Lastly, when securing the Screw-top Battery Cover please avoid cross threading it when screwing clock wise. To ensure thread alignment momentarily back off counter clockwise and tighten screw top clock-wise. Return Black Rubber Protective Boot; be sure it is seated firmly.

Battery Spec: CR2032

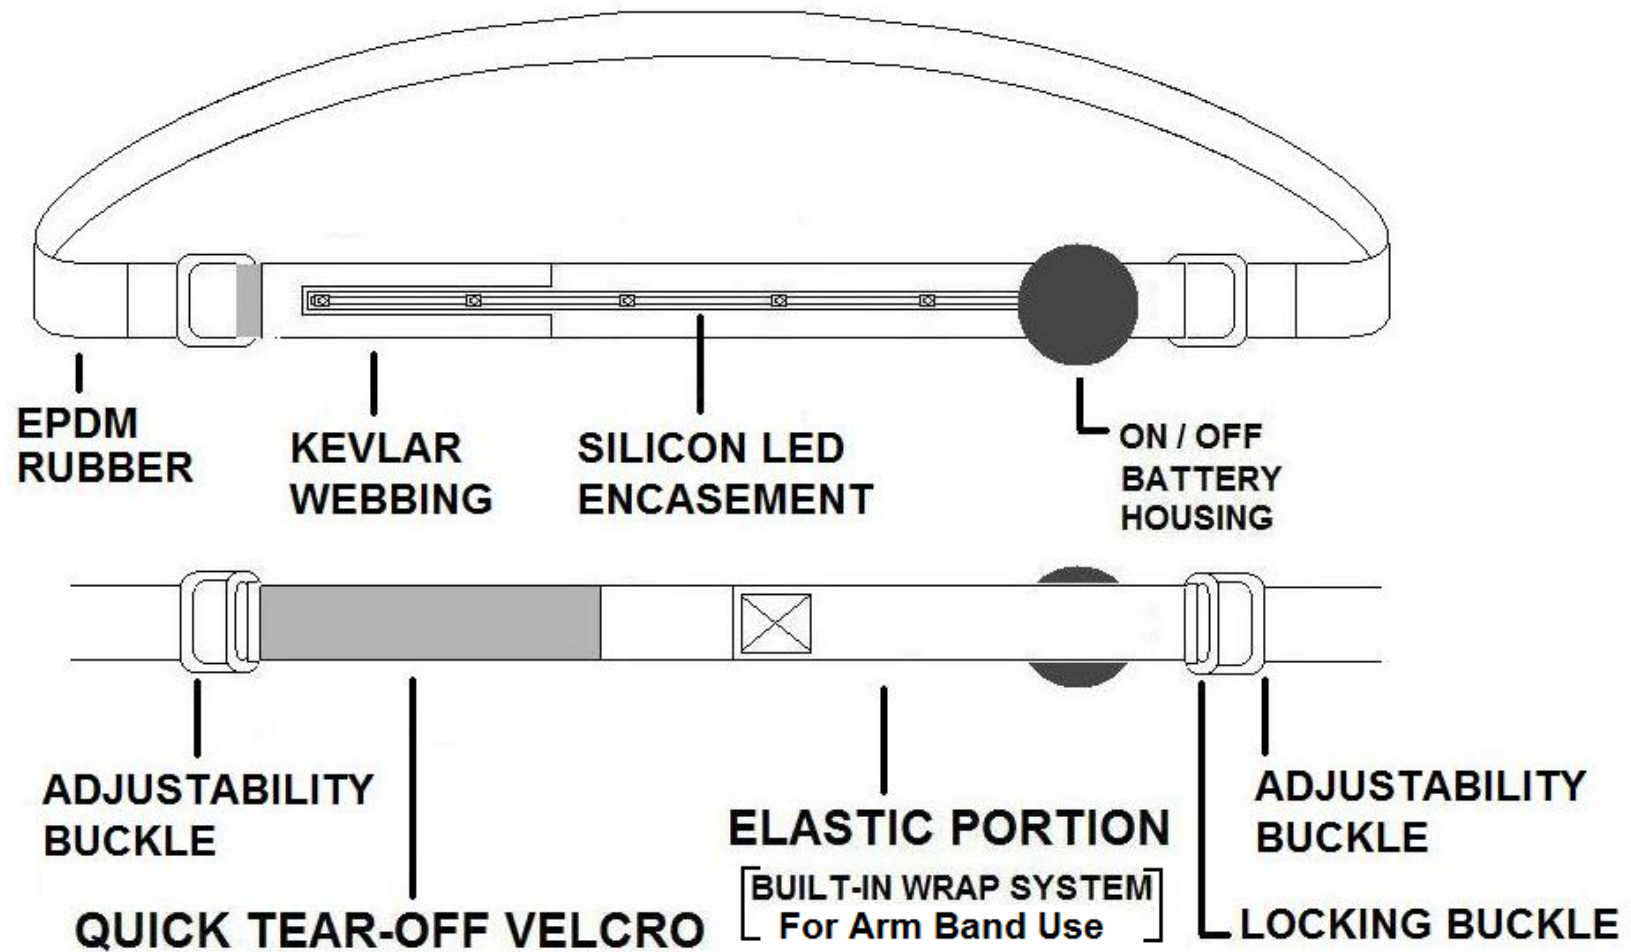

CSC GROUP LLC: PRODUCT DISCLAIMER

The GLO-JO® P.A.L.™ is an ancillary device that should not be worn alone, but in conjunction with other required safety equipment. Many individual components of the GLO-JO® P.A.L.™ have been 3rd party tested for heat and flame resistance, but the GLO-JO® P.A.L.™ as a whole has not been tested by a 3rd party. Therefore, the GLO-JO® P.A.L.™ has not been proven to be intrinsically safe, as well as being heat, flame, impact, and water resistant according to a specific 3rd party requirement so as to insure its appropriateness. All users assume full responsibility for the use and application of the GLO-JO® P.A.L.™ helmet band.

TO THE MAXIMUM EXTENT PERMITTED BY LAW, CSC GROUP LLC DISCLAIMS ALL REPRESENTATIONS AND WARRANTIES, WHETHER EXPRESS, IMPLIED OR STATUTORY, ORAL OR IN WRITING, INCLUDING, WITHOUT LIMITATION, WITH RESPECT TO MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.

UNDER NO CIRCUMSTANCES SHALL CSC GROUP LLC BE LIABLE FOR ANY INDIRECT, INCIDENTAL, SPECIAL, PUNITIVE OR CONSEQUENTIAL DAMAGES, INCLUDING LOSS OF PROFITS, REVENUE, DATA, OR USE, WHETHER IN AN ACTION IN CONTRACT OR TORT OR BASED ON A WARRANTY, EVEN IF THE PARTY CLAIMING SUCH DAMAGES HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. CSC GROUP LLC'S AGGREGATE LIABILITY SHALL NOT EXCEED THE DOLLAR AMOUNT PAID FOR THE ITEM IN QUESTION.